HEAD PROFILE


QUALITY	THICKNESS mm	ZINC COATING gr/m2	WEIGHT/METER kg
S280GD	1,50	275	1,66 ± 0,17
S280GD	1,80	275	1,99 ± 0,20
S280GD	2,00	275	2,21 ± 0,22


PROFILE LENGTH m	NUMBER OF HOLES	DISTANCE WITHOUT DRILLING TO THE END OF PROFILE mm
		A
1,5	6	900
1,5	8	700
1,5	10	500
1,6	6	1000
1,7	8	900
1,8	8	1000
1,8	10	800
1,8	12	600
1,9	10	900
2,0	10	1000
2,1	12	900
2,2	12	1000
2,3	14	900
2,4	14	1000
2,5	16	900
2,6	16	1000


DRILLING	
SHAPE	○ Other models can be applied

PACKAGING	100 units

MANUFACTURING STANDARDS	EN 10143:2007 and EN 10346:2015



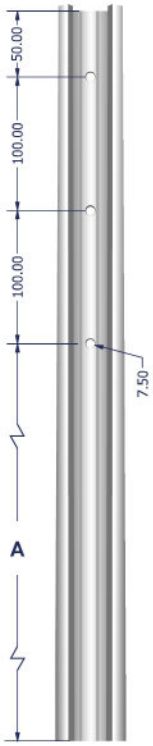

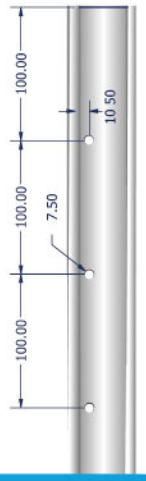

PÉRTECNO S.A.



PÉRTECNO S.A.

VINEYARD POSTS

Agricultural posts are an economical and viable solution for the mechanization of **viticultural** activity.
We produce and market various types of posts suitable for vineyards and olive groves.

MANUFACTURING STANDARDS	EN 10143:2007 and EN 10346:2015
APPLICATION	Vineyards and olive groves

ADVANTAGES

. Quick assembly

. Good ground anchoring

. High resistance to compression and corrosion


. Durable material

. Eco-friendly solution


Cofinanciado por:
CENTRO 2020 PORTUGAL 2020

LINE PROFILE

QUALITY	THICKNESS mm	ZINC COATING gr/m2	WEIGHT/METER kg
S280GD	1,20	275	1,04 ± 0,11
S280GD	1,50	275	1,30 ± 0,13
S280GD	1,80	275	1,56 ± 0,16




PROFILE LENGTH m	NUMBER OF HOLES	DISTANCE WITHOUT DRILLING TO THE END OF PROFILE mm
		A
1,5	6	950
1,5	8	750
1,5	10	550
1,6	6	1050
1,7	8	950
1,8	8	1050
1,8	10	850
1,8	12	650
1,9	10	950
2,0	10	1050
2,1	12	950
2,2	12	1050
2,3	14	950
2,4	14	1050
2,5	16	950
2,6	16	1050

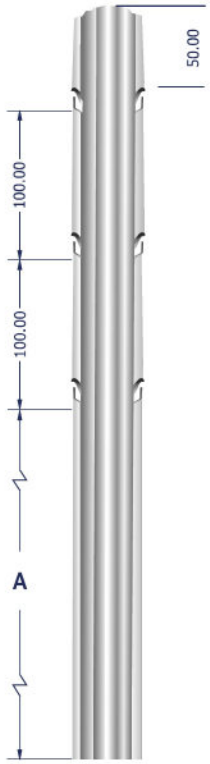

DRILLING	
SHAPE	V
	V e O
	Other models can be applied
DISTANCES	100mm parallel or alternating


PACKAGING	200 units

MANUFACTURING STANDARDS	EN 10143:2007 and EN 10346:2015

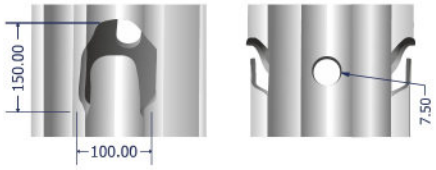


LINE PROFILE XL

QUALITY	THICKNESS mm	ZINC COATING gr/m2	WEIGHT/METER kg
S280GD	1,50	275	1,66 ± 0,17
S280GD	1,80	275	1,99 ± 0,20
S280GD	2,00	275	2,21 ± 0,22

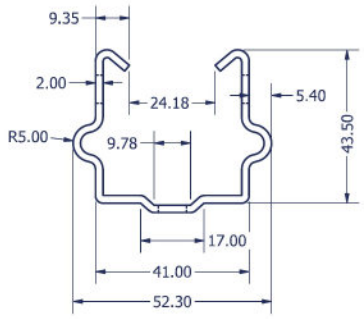

PROFILE LENGTH m	NUMBER OF HOLES	DISTANCE WITHOUT DRILLING TO THE END OF PROFILE mm
		A
1,5	6	950
1,5	8	750
1,5	10	550
1,6	6	1050
1,7	8	950
1,8	8	1050
1,8	10	850
1,8	12	650
1,9	10	950
2,0	10	1050
2,1	12	950
2,2	12	1050
2,3	14	950
2,4	14	1050
2,5	16	950
2,6	16	1050

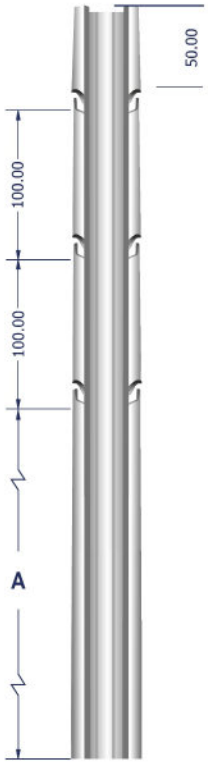

DRILLING	
SHAPE	V
	V e O
	Other models can be applied
DISTANCES	100mm parallel or alternating

PACKAGING	100 units

MANUFACTURING STANDARDS	EN 10143:2007 and EN 10346:2015

